


Electrical Information:

1. TURNS RATIO [2-6] : [9-13] = 0.428 +/-2%
2. INDUCTANCE [2-6] = 190 uH Nom, 145 Min @100kHz/1.0V
3. LEAKAGE INDUCTANCE [2-6] : SHORT 9-13 = 60nH Max @100kHz
4. DCR [2-6] = 7.0 mohms Nom, DCR [9-13] = 41.5 mohms Nom,
5. CAPACITANCE 2,6 to 9,13 = 120 pF Max @100kHz
6. DIELECTRIC ISOLATION: [2,6] : [9,13] > 2500 Vrms
DIELECTRIC ISOLATION: [9,13] : CORE > 500 Vdc
7. RoHS Level 6/6 Compliant | Pins 96/4 Sn/Ag Plating

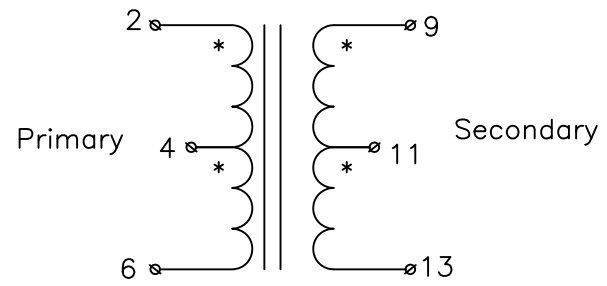

APPLICATION 36-72VIN TO 54VOUT @3A FORWARD

					CHAMPS TECHNOLOGIES	TOLERANCES UNLESS OTHERWISE INDICATED .XXX ± .XX ± .X ±	DRAWN	JL	11/18/14	TITLE: 80R2-0614		ISSUE	REV
							CHKD	PH			SIZE	SCALE 2:1	A
No.	DESCRIPTION	REVISIONS	DATE	APPR			APPR	DT					