


Electrical Information:

1. TURNS RATIO [2-6] : [9-13] 0.571 +/--2%
 TURNS RATIO [1-7] : [9-13] 0.143 +/--2% || [8-14] : [9-13] = 0.072
2. INDUCTANCE [2-6] = 384 uH Nom @100kHz/1.0V
3. LEAKAGE INDUCTANCE [2-6] : SHORT 9-13 = 200 nH Nom @100kHz
4. DCR [2-6] = 17.7 mohms Nom, DCR [9-13] = 61 mohms Nom,
 DCR [2-6] & [8-14] = 300 mohm max
5. CAPACITANCE 2,6 to 9,13 = 130 pF Nom, 180 Max@100kHz
6. DIELECTRIC ISOLATION: [2,6]: [9,13][8,14] > 1500 VDC
 DIELECTRIC ISOLATION: [9,13][8,14] : CORE > 500 Vdc
7. RoHS Level 6/6 Compliant | Pins 96/4 Sn/Ag Plating
8. Operating Temp Range -55C to +130C [Inclusive of Application Temp Rise]
9. Storage Temp Range -55C to +130C [Materials rated to +170C]

Schematic

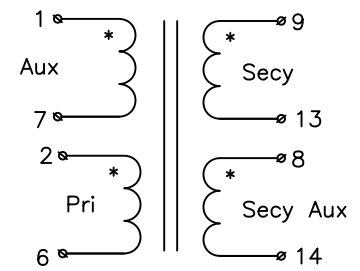

No.		DESCRIPTION		REVISIONS	DATE	APPR
THIRD ANGLE PROJECTION						
CHAMPS TECHNOLOGIES						
TOLERANCES UNLESS OTHERWISE INDICATED		SIGN	DATE	Champs No. P26R6-0814-02-S01		
.XXX ± .25	.XX ± .51	JL	05.20.15	Customer		ISSUE A
.X ± 1.0	ANGLE ±	PH		Part #:		REV 00
		APPR	DT	SIZE	SCALE 2:1	