


Electrical Information:

1. TURNS RATIO [2-6] : [9-13] = 0.571 +/-2% || [8-14] : [9-13] = 0.143
2. INDUCTANCE [2-6] = 342 uH Nom, 258 Min @100kHz/1.0V
3. LEAKAGE INDUCTANCE [2-6] : SHORT 9-13 = 250nH Nom @100kHz
4. DCR [2-6] = 11 mohms Nom, DCR [9-13] = 37 mohms Nom, DCR [8-14] = 300 mohm max
5. CAPACITANCE 2,6 to 9,13 = 120 pF Nom @100kHz
6. DIELECTRIC ISOLATION: [2,6] : [9,13], [[8,14] > 2500 Vrms
DIELECTRIC ISOLATION: [9,13} : [8.14] : CORE > 500 Vdc
7. RoHS Level 6/6 Compliant | Pins 96/4 Sn/Ag Plating

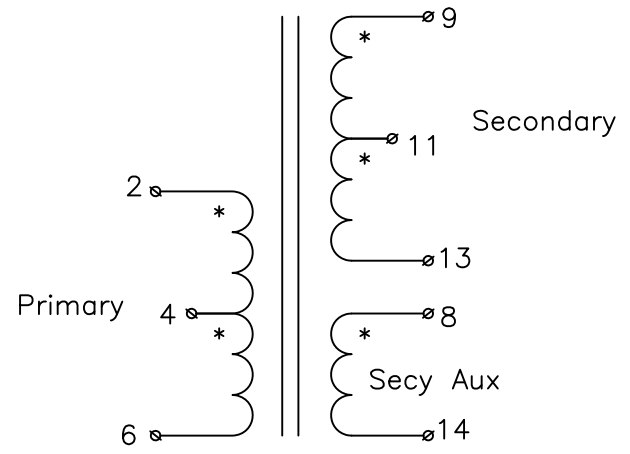

APPLICATION 50-150VIN TO 54VOUT @3.0A FORWARD

				CHAMPS TECHNOLOGIES	TOLERANCES UNLESS OTHERWISE INDICATED .XXX ± .XX ± ANGLE ±	DRAWN	JL	1/27/15	TITLE: 80R6-0814-S02		ISSUE	REV
						CHKD	PH			SIZE	SCALE 2:1	A
No.	DESCRIPTION	REVISIONS	DATE	APPR		APPR	DT					