


Electrical Information:

1. TURNS RATIO [9-13] : [2-6] = 0.375 +/-2% || [1-7] : [2-6] = 0.375
2. INDUCTANCE [2-6] = 150 uH Nom +/-10% @100kHz/1.0V
3. LEAKAGE INDUCTANCE [2-6] : SHORT 9,13 = 150 nH Max @100kHz
4. DCR [2-6] = 25 mohms Nom, DCR [9-13] = 4 mohms Nom, DCR [1-7] = [8-14] = 50 mohm max
5. CAPACITANCE 2,6 to 9,13 = 450 pF Max @100kHz
6. DIELECTRIC ISOLATION: [2,6],[1,7] : [9,13] > 2500 Vrms  
DIELECTRIC ISOLATION: [9,13] : CORE > 500 Vdc
7. RoHS Level 6/6 Compliant | Pins 96/4 Sn/Ag Plating
8. Operating Temp Range -55C to +130C [Inclusive of Application Temp Rise]
9. Storage Temp Range -55C to +130C [Materials rated to +170C]

Schematic

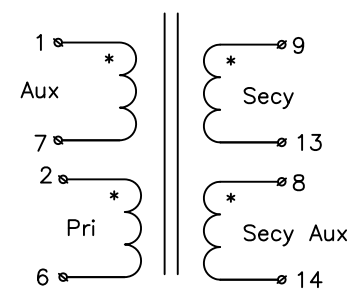

No.		DESCRIPTION		REVISIONS	DATE	APPR
CHAMPS TECHNOLOGIES						
THIRD ANGLE PROJECTION						
TOLERANCES +/- 1.0 UNLESS OTHERWISE INDICATED		SIGN	DATE	Champs No. P26R6-0803-03-150R		
.XXX ±	CHKD	JL	12/2/14	Customer		ISSUE A
.XX ±	APPR	PH		Part #:		REV 00
.X		DT		SIZE	SCALE 2:1	
ANGLE ±						